



Type 3GG /玻璃管電流保險絲 Glass Fast Acting Fuse

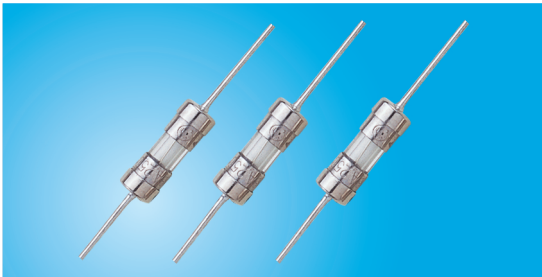


Dimensions(mm)尺寸

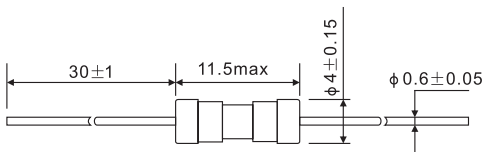

Electrical Specifications 電氣特性

Catalog Number 料號	Ampere Rated In 額定電流	Voltage Rating (VAC) 額定電壓	Normal Resistance Cold(Ohm) 標準冷阻值	Normal Melting I ² T(A ² sec) 標準熔斷值
3GG500	500mA	125V 250V	0.165	0.187
3GG1	1A		0.065	0.75
3GG1.25	1.25A		0.0788	1.171
3GG2	2A		0.0383	3.11
3GG2.5	2.5		0.0265	4.68
3GG3	3A		0.0244	6.75
3GG3.15	3.15A		0.0243	7.44
3GG4	4A		0.0197	12
3GG5	5A		0.0148	18.7
3GG6	6A		0.0114	27
3GG8	8A		0.0091	48
3GG9	9A	0.0081	60.75	
3GG10	10A	0.0760	75	

Time Current Characteristic Curve/電流-時間曲綫

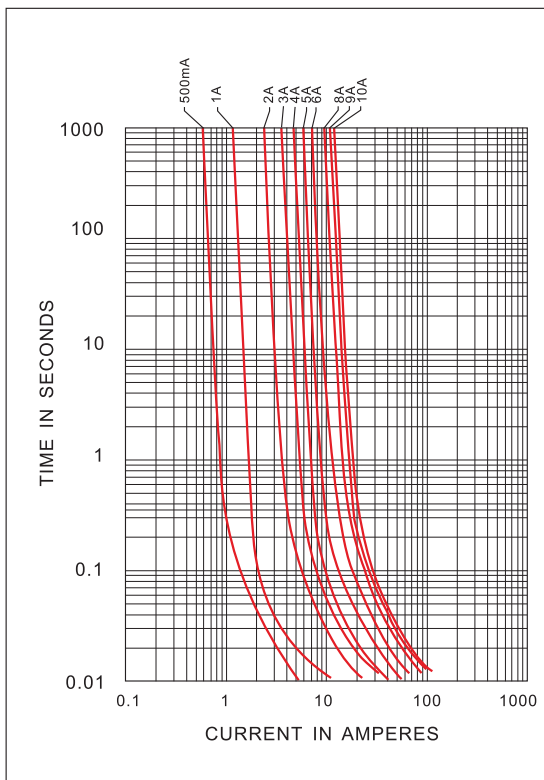

Electrical Characteristics 熔斷特性 (UL248-14)

Testing Current	Blow Time	
	Minimum	Maximum
100%	4 hrs	N/A
200%	N/A	5 sec

Approvals 認證

Safety Agency	Amp range/Volt @ I.R. ability
	500mA-10A/125VAC @ 50A 500mA-10A/250VAC @ 50A

Operation Temperature 工作溫度

-40°C to 125°C

Physical Specification 物理特性

Materials 材料

Glass body / Nickel Plated Brass Caps
Lead Wire: Tin plated Copper, Diameter 0.6mm

Packaging 包裝

In Bulk: 3GG-500pcs per bag
3GG-20000 pcs outer box