


## Type 5GG/5GGP /玻璃管電流保險絲 Glass Fast Acting Fuse




### Dimensions(mm)尺寸

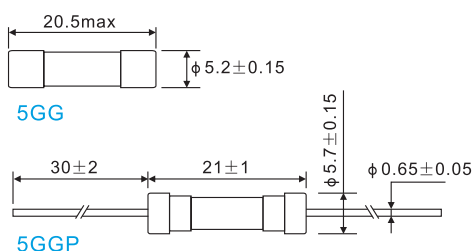

### Electrical Specifications 電氣特性

| Catalog Number<br>料號 | Ampere Rated In<br>額定電流 | Voltage Rating (VAC)<br>額定電壓 | Normal Resistance Cold(Ohm)<br>標準冷阻值 | Normal Melting I <sup>2</sup> T(A <sup>2</sup> sec)<br>標準熔斷值 |
|----------------------|-------------------------|------------------------------|--------------------------------------|--|
| 5GG(P)500            | 500mA                   | 125V/<br>250V                | 0.2582                               | 0.288  |
| 5GG(P)1              | 1A                      |                              | 0.1317                               | 1.00   |
| 5GG(P)1.2            | 1.2A                    |                              | 0.0946                               | 1.66   |
| 5GG(P)2              | 2A                      |                              | 0.0500                               | 4.6  |
| 5GG(P)2.5            | 2.5A                    |                              | 0.0422                               | 7.2  |
| 5GG(P)3              | 3A                      |                              | 0.0370                               | 10.37  |
| 5GG(P)3.15           | 3.15A                   |                              | 0.0316                               | 11.43  |
| 5GG(P)4              | 4A                      |                              | 0.0228                               | 18.43  |
| 5GG(P)5              | 5A                      |                              | 0.0185                               | 32.5   |
| 5GG(P)6              | 6A                      |                              | 0.0158                               | 41.47  |
| 5GG(P)6.3            | 6.3A                    | 0.0149                       | 45.72                                |  |
| 5GG(P)7              | 7A                      | 0.0124                       | 56.45                                |  |
| 5GG(P)8              | 8A                      | 0.0108                       | 73.72                                |  |
| 5GG(P)9              | 9A                      | 0.0094                       | 93.3                                 |  |
| 5GG(P)10             | 10A                     | 0.0080                       | 133.1                                |  |

### Time Current Characteristic Curve/電流-時間曲綫

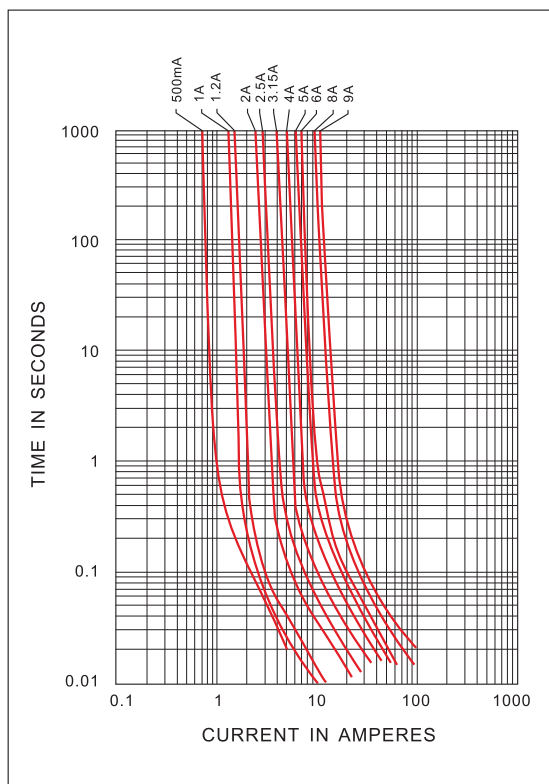

### Electrical Characteristics 熔斷特性 (UL248-14)

| Testing Current | Blow Time |         |
|-----------------|-----------|---------|
|                 | Minimum   | Maximum |
| 100%            | 4 hrs     | N/A     |
| 135%            | N/A       | 1 hrs   |
| 200%            | N/A       | 5 sec   |

### Approvals 認證

| Safety Agency | Amp range/Volt @ I.R.ability |
|---------------|------------------------------|
|               | 500mA-1A/250V AC@35A         |
|               | 1.2A-3.15A/250V AC@100A      |
|               | 4A-10A/250V AC@200A          |
|               | 500mA-10A/125V AC@10000A     |

### Operation Temperature 工作溫度

-40°C to 125°C

### Physical Specification 物理特性

#### Materials 材料

Glass body / Nickel Plated Brass Caps  
Lead Wire: Tin plated Copper, Diameter 0.65mm

#### Packaging 包裝

In Bulk: 5GGP-200pcs bag  
5GGP-18000 pcs outer box