




Type 6125SB/方塊型保險絲Slow Blow Brick Fuse

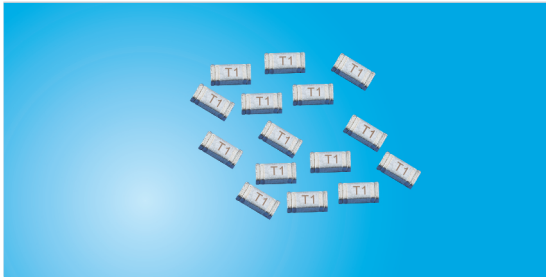


Dimensions(mm)尺寸

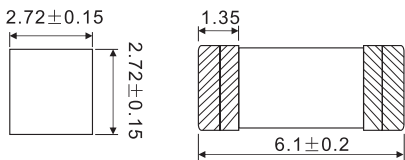

Recommended Pad Layout(mm)



Time Current Characteristic Curve/電流-時間曲綫

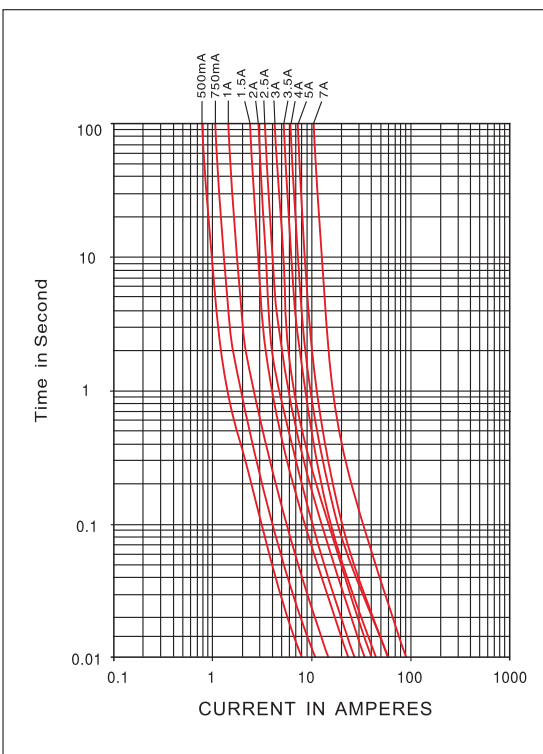

Electrical Specifications 電氣特性

Catalog Number 料號	Ampere Rated In 額定電流	Marking 標記	Voltage Rating (V) 額定電壓	Normal Resistance Cold(Ohm) 標準冷阻值	Normal Melting I ² T(A ² sec) 標準熔斷值
6125SB500mA	500mA	T0.5	AC125V/DC60V	0.4025	0.716
6125SB750mA	750mA	T0.75	AC125V/DC60V	0.2350	1.070
6125SB1A	1A	T1	AC125V/DC60V	0.1550	3.820
6125SB1.5A	1.5A	T1.5	AC125V/DC60V	0.0680	8.440
6125SB2A	2A	T2	AC125V/DC60V	0.0450	13.24
6125SB2.5A	2.5A	T2.5	AC125V/DC60V	0.0305	19.56
6125SB3A	3A	T3	AC125V/DC60V	0.0255	18.36
6125SB3.5A	3.5A	T3.5	AC125V/DC60V	0.0185	25.36
6125SB4A	4A	T4	AC125V/DC60V	0.0180	44.00
6125SB5A	5A	T5	AC125V/DC60V	0.0130	40.00
6125SB7A	7A	T7	AC125V/DC60V	0.0085	85.26

Electrical Characteristics 熔斷特性

Electrical Characteristics 熔斷特性		
Ampere Rating	% of Amp Rating	Opening Time
500mA-7A	100%	4 Hours Minimum
	200%	1 Seconds Minimum
	200%	2-4 Seconds Typical
	200%	60 Seconds Maximum

Approvals 認證

Safety Agency	Amp Range/Volt @ I.R ability
	500mA-7A 125V AC/60V DC@50A

Operation Temperature 工作溫度

-40°C to 125°C

Physical Specification 物理特性

Materials 材料

Ceramic Body/Metallization of ceramic body
 Fuse Element: copper or copper Alloy
 End plate: copper
 High temperature solder preform
 End termination overcoat on both ends
 (Nickel Flash, Tin/Lead Overcoat)

Packaging 包裝

On Tape: 6125SB-5000pcs Per Reel
 6125SB-50000 pcs outer box